

167 Model Low Differential Pressure Transducer

alpha[∞]
instruments



The Model 167 Series are low range differential pressure transducers and transmitters. It was specially designed for 35mm DIN Rail Mount, which dramatically reduces the required mounting space and installation cost. The green and red LED indicators show the working status of the unit in the field.

The Model 167 Series are available for full scale pressure range from 0 to 0.1"WC till 0 to 100"WC. Both unidirectional and bidirectional pressure ranges are offered. The output of the Model 167 Pressure Transducer is available in two versions: 0 to 5VDC and 0 to 10VDC, where 0VDC is true zero without offset. The output of Model 167 Pressure Transmitter is 4 to 20 mA. The Units can be temperature compensated to 0.01%FS/°F.

The accuracy can be 0.6%, 0.4% or 0.25% at room temperature. The patented variable capacitance pressure sensor is constructed by stainless steel and glass, no glue or other organics. That provides excellent performance, corrosion resistance and long-term stability.

Additionally, our unique production setup allows us to accommodate special orders for nonstandard pressure ranges (e.g. -0.5"WC to +3.5"WC).

Model 167 Specifications

Performance Data	Standard	Optional	Optional
Accuracy* (at room temp)	±0.60%FS	±0.40%FS	±0.25%FS
Non-Linearity (BFSL)	±0.55%FS	±0.37%FS	±0.20%FS
Hysteresis	±0.20%FS	±0.10%FS	±0.10%FS
Non-Repeatability	±0.10%FS	±0.10%FS	±0.10%FS
Thermal Effects: Zero/Span Shift (°F)	±0.03%FS	±0.02%FS	±0.01%FS
Compensated Range	20 to 170° F (-7 to 77°C)		
Maximum Line Pressure	15PSI(100kPa)		
Overpressure	15PSI(100kPa) in Positive or Negative Direction for all Ranges		
Stability	±0.5% FS/YR		
Warm-up Shift	±0.1%FS		
Position Effect	Each unit is calibrated in the vertical position. For best accuracy, adjust zero of the unit if it is mounted in other position. It is not necessary to adjust the sensitivity.		

* RSS of Non-Linearity, Hysteresis, and Non-Repeatability.

Environmental Data and Physical Description

Operating Temperature	0 to 170°F (-18 to 77°C)
Storage Temperature	-65 to 185°F (-54 to 85°C)
LED for Quick Status	LED Off No Power or Too much Pressure to Negative side
Diagnostics	Only Green On Working Properly Green and Red On ... Too much Pressure to Positive Side.
Electrical Termination	5mm Euro style pluggable terminal block accepts 12-24 gauge wire
Pressure Fittings	3/16" O.D. barbed brass for 1/8" I.D. push-on tubing(standard). 8mm O.D. barbed brass(optional).
Zero & Span Adjustment	Top accessible
Pressure Media	Typically air or similar non-conducting gases
Enclosure	PC+ABS Alloy, Nickel Plated or 94V-0 Rated
Weight	7.00Z/198g
Installation	35mm DIN Rail (EN50022).

Applications:

- Power Plant Air Flow Monitor and Control
- Textile Machinery
- Clean Room and Fume Hood Control
- Duct Static Pressure Measurement
- Draft Control
- HVAC and VAV Control
- Furnace Air Flow Control

Features

- LED Working Status Indicators
- DIN Rail Mount
- Up to 15 PSI Overpressure on All Ranges
- Detachable Euro Style Terminal Block Reduces Wiring Errors and Field Wiring Time.
- Incorrect Wiring Protection
- Unsymmetrical Bidirectional Pressure Ranges
- True Zero Output for Voltage Unit
- Meets CE Conformance Standards
- Meets RoHS Requirements
- Pressure Ranges as Low as 10Pa!

Visit us Online:

www.alphainstruments.com

E-mail: sales@alphainstruments.com

978-264-2966

Model 167 Specifications

Electrical Data (Voltage)

Circuit 3-Wire (+EXC, -EXC, OUTPUT), Protected against incorrect wiring
 Excitation 16-32VDC/16-30VAC
 Output* 0-5VDC, 0-10VDC
 Output Impedance ≤ 5.0 OHMS
 * Zero output: factory set at ± 25 mV(0-5VDC), ± 50 mV(0-10VDC)
 Span output: factory set at ± 25 mV(0-5VDC), ± 50 mV(0-10VDC)
 Calibrate with a 50K OHM load. Operable with a load greater than 5K OHM for 0-5VDC output, greater than 10K OHM for 0-10VDC output.

Electrical Data (Current)

Circuit 2-Wire (+EXC, -EXC), Protected against incorrect wiring
 Excitation 16-32VDC (see diagram 2 for maximum loop resistance)
 Output** 4-20mA
 Bidirectional Output at Zero 12mA as standard
 External Load 0-800 OHM
 * Zero output: factory set at ± 0.08 mA
 Span output: factory set at ± 0.08 mA
 Calibrated with a 250 OHM load and a 24VDC supply voltage.

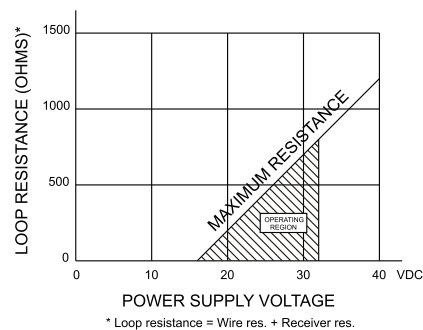


Diagram 2

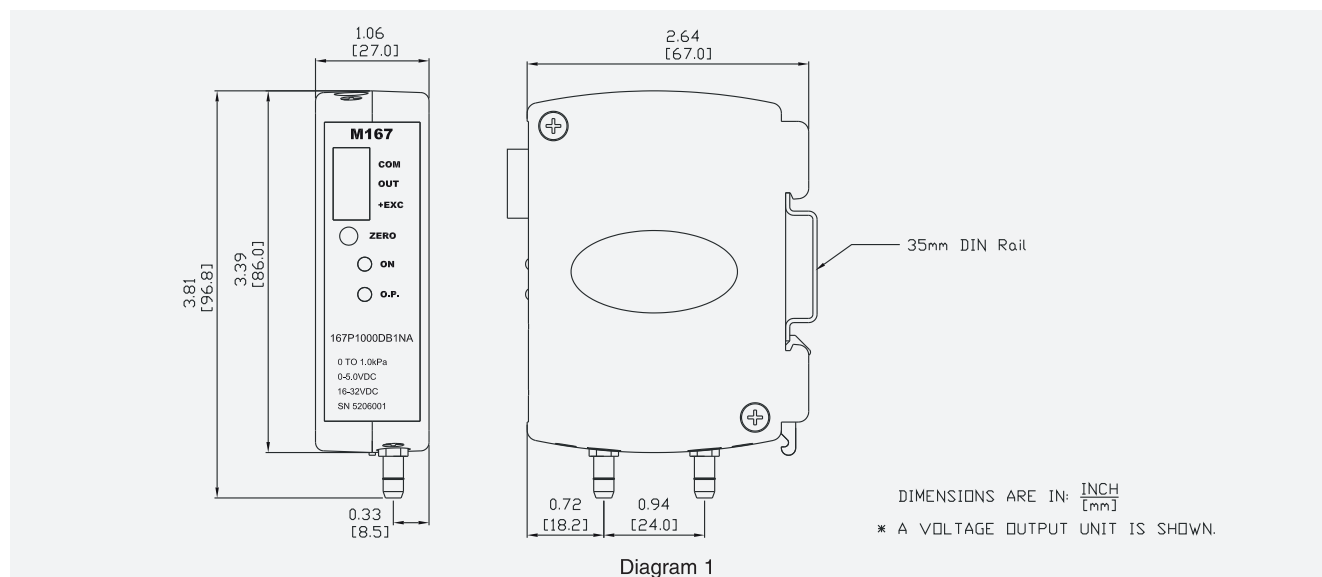


Diagram 1

Ordering Information Code all blocks in table.

Example: 167W00R1DA6NA for 167 Transmitter, 0~0.1 in. WC Range, Unidirectional, 4-20mA Output, 0.6% Accuracy, No Calibration Certificate, 3/16" Barbed Brass Pressure Fittings.

Model	Unit	Range	Pressure Type	Output	Accuracy	Certificate	Pressure Fitting	Special Range
167	P: Pascal W: in. W.C.	NNNN	Differential D: Unidirectional B: Bidirectional	A: 4-20mA B: 0-5VDC C: 0-10VDC	6: 0.6%FS 4: 0.4%FS 2: 0.25%FS	Y: (with) N: (without)	A: 3/16" B: 8mm (Barbed Brass)	S

Pressure Unit/Range/Type

in. W.C. (Unidirectional)

W00R1D=0 to 0.1 in. WC
 W0R25D=0 to 0.25 in. WC
 W00R5D=0 to 0.5 in. WC
 W0001D=0 to 1 in. WC
 W02R5D=0 to 2.5 in. WC
 W0005D=0 to 5 in. WC
 W0010D=0 to 10 in. WC
 W0025D=0 to 25 in. WC
 W0050D=0 to 50 in. WC
 W0100D=0 to 100 in. WC

in. W.C. (Bidirectional)

W0R05B=-0.05 to 0.05 in. WC
 W00R1B=-0.1 to 0.1 in. WC
 W0R25B=-0.25 to 0.25 in. WC
 W00R5B=-0.5 to 0.5 in. WC
 W0001B=-1.0 to 1.0 in. WC
 W02R5B=-2.5 to 2.5 in. WC
 W0005B=-5.0 to 5.0 in. WC
 W0010B=-10 to 10 in. WC
 W0025B=-25 to 25 in. WC
 W0050B=-50 to 50 in. WC

Pascal (Unidirectional)

P0025D=0 to 25 Pa
 P0050D=0 to 50 Pa
 P0100D=0 to 100 Pa
 P0250D=0 to 250 Pa
 P0500D=0 to 500 Pa
 P1000D=0 to 1000 Pa
 P2500D=0 to 2500 Pa
 P5000D=0 to 5000 Pa
 P100CD=0 to 10000 Pa
 P250CD=0 to 25000 Pa

Pascal (Bidirectional)

P0010B=-10 to 10 Pa
 P0025B=-25 to 25 Pa
 P0050B=-50 to 50 Pa
 P0100B=-100 to 100 Pa
 P0250B=-250 to 250 Pa
 P0500B=-500 to 500 Pa
 P1000B=-1000 to 1000 Pa
 P1250B=-1250 to 1250 Pa
 P2000B=-2000 to 2000 Pa
 P5000B=-5000 to 5000 Pa
 P100CB=-10000 to 10000 Pa

* Specifications subject to change without notice. If you don't see what you need here, please contact us.

Tel: 978-264-2966 • E-mail: sales@alphainstruments.com • Web: alphainstruments.com